


byko-spectra *basic*

For general color evaluation under defined lighting conditions the byko-spectra *basic* light booth offers the following benefits:

- Comparison of standard and sample in a color-neutral environment
- Three different controlled light sources:

Daylight	D65
Incandescent light	A
Department store light	CWF or TL84
- Easy to operate by using individual switches for each light source
- Can be set up in minutes without any tools
- Economical testing of large samples in a compact design – for laboratory and production

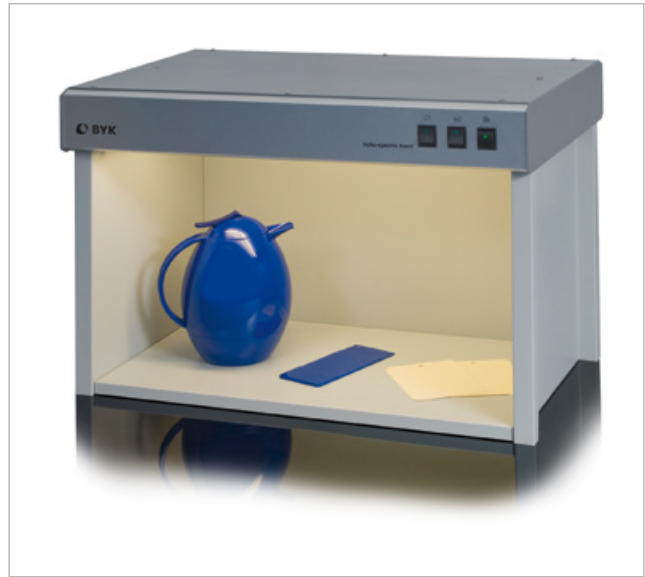

Standards

ASTM	D 1729
ISO	3668 (accessory required)

Certified Please refer to section Preventive Maintenance

Ordering Information

Cat. No.	Description
6054	byko-spectra basic, TL84, 230 V
6052	byko-spectra basic, CWF, 230 V
6051	byko-spectra basic, CWF, 115 V
6053	byko-spectra basic, TL84, 115 V

Comes complete with:
 byko-spectra *basic* light booth
 3 light sources: D65, A, CWF or TL84
 Certificate
 Operating instructions

Technical Specifications

	Voltage	D65	A	CWF	TL84
	230 V, 50/60 Hz	X	X		X
	230 V, 50/60 Hz	X	X	X	
	115 V, 50/60 Hz	X	X	X	
	115 V, 50/60 Hz	X	X		X
Dimensions	48 x 67 x 42 cm (19 x 26.5 x 16.5 in)				
Viewing Area	37 x 60 x 33 cm (15 x 24 x 13 in)				
Weight	14 kg (30 lbs)				

Ordering Information

Cat. No.	Description
6055	Lamp Kit for 6051/6052
6056	Lamp Kit for 6053/6054
6070	Lamp Kit, certified for 6051/6052
6071	Lamp Kit, certified for 6053/6054
6058	ISO Panel Set for 6051 - 6054

Accessories

	Voltage	D65	A	CWF	TL84
	230 / 115 V	X	X	X	
	230 / 115 V	X	X		X
	230 / 115 V	X	X	X	
	230 / 115 V	X	X		X

Note: We recommend to replace the lamps every 2500 hours.